

CN 614.4-KU POSICIONADOR

Tipo de pressão / com parafuso

Habitação

Aço inoxidável AISI 305


Plástico **KU**


Poliacetil POM, branco

resistente à temperatura até +50 °C

Primavera

Aço inoxidável AISI 631

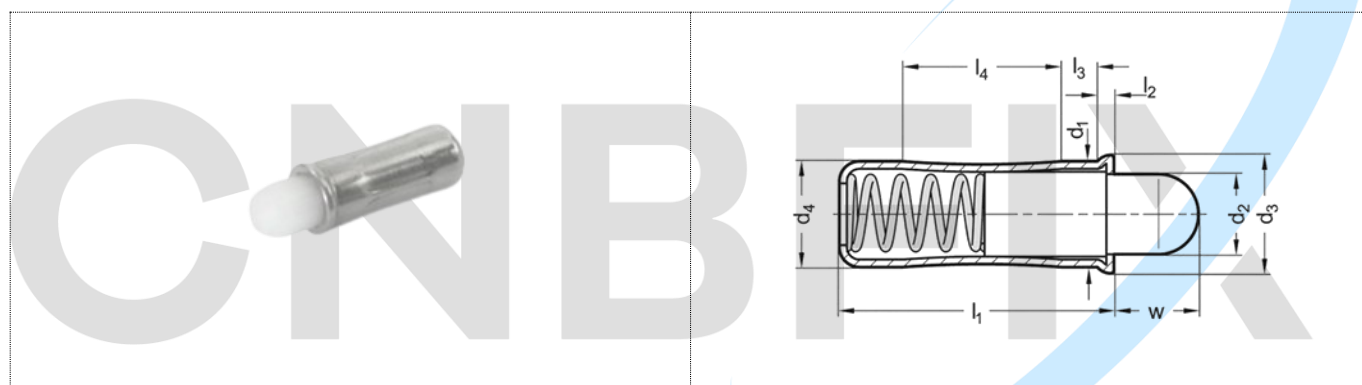

Descrição	$d_1 + 0.1$	d_2	d_3	$d_4 \pm 0.05$	l_1	$l_2 \approx$	$l_3 \approx$	$l_4 \approx$	w	Carga de mola em N \approx inicial	Carga de mola em N \approx final	
CN 614.4-04-KU	4	2.8	4.6	4	10.7	0.9	1.8	5.6	2.7	3	8.2	1
CN 614.4-05-KU	5	3.8	5.6	5	12	0.9	2.1	6	4	3.3	9	1
CN 614.4-06-KU	6	4.8	6.5	6	15	1	2.3	8.2	5.5	6.1	12	1
CN 614.4-08-KU	8	6.2	8.5	7	18	1.1	2.9	9.5	6.5	10.7	17	3

CN 614.4-10-KU	10	8	11	9	26	1.5	3.5	15	8	16.2	29	3
----------------	----	---	----	---	----	-----	-----	----	---	------	----	---

