



# DIN 508 PORCA T

Aço

- Aço tratado termicamente
- Classe de resistência à tração 8 em branco
- Classe de resistência à tração 10
- Enegrecido

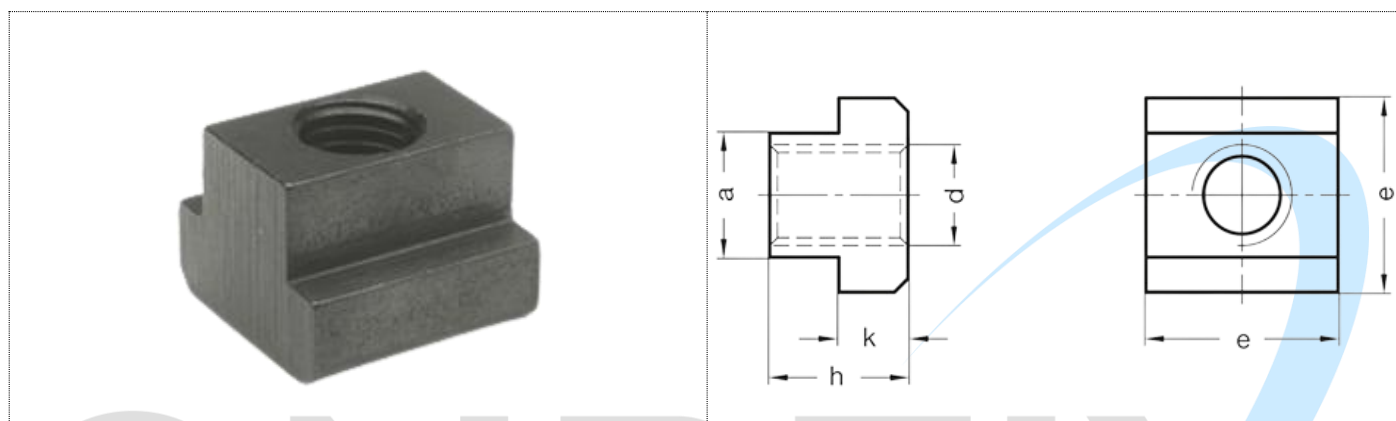

Descrição	um -0,3/-0,5	e	e	o	o	Largura da ranhura em T DIN 650	
<b>DIN 508-5-8</b>	5	-	9-0.5	6.5	30-0.3	5	3
<b>DIN 508-6-8</b>	6	-	10-0.5	8	4 0.5	6	5
<b>DIN 508-8-8</b>	8	-	13-0.5	10	6-0.5	8	10
<b>DIN 508-10-8</b>	10	-	15-0.5	12	6-0.5	10	10
<b>DIN 508-12-8</b>	12	-	18-0.5	14	7-0.5	12	26
<b>DIN 508-14-8</b>	14	-	22-0.5	16	8-0.5	14	46
<b>DIN 508-16-8</b>	16	-	25-0.5	18	9-0.5	16	66
<b>DIN 508-18-8</b>	18	-	28-0.5	20	10-0.5	18	90
<b>DIN 508-20-8</b>	20	-	32-0.5	24	12-0.5	20	148

<b>DIN 508-22-8</b>	22	-	35 -0.5	28	14 -0.5	22	200
<b>DIN 508-24-8</b>	24	-	40 -0.5	32	16 -0.5	24	258
<b>DIN 508-28-8</b>	28	-	44 -1	36	18 -1	28	420
<b>DIN 508-5-M4-8</b>	5	M4	9 -0.5	6.5	3 -0.3	5	2
<b>DIN 508-5-M4-10</b>	5	M4	9 -0.5	6.5	3 -0.3	5	2
<b>DIN 508-6-M5-8</b>	6	M5	10 -0.5	8	4 -0.5	6	4
<b>DIN 508-6-M5-10</b>	6	M5	10 -0.5	8	4 -0.5	6	4
<b>DIN 508-8-M6-8</b>	8	M6	13 -0.5	10	6 -0.5	8	8
<b>DIN 508-8-M6-10</b>	8	M6	13 -0.5	10	6 -0.5	8	9
<b>DIN 508-10-M6-8</b>	10	M6	15 -0.5	12	6 -0.5	10	14
<b>DIN 508-10-M6-10</b>	10	M6	15 -0.5	12	6 -0.5	10	15
<b>DIN 508-10-M8-8</b>	10	M8	15 -0.5	12	6 -0.5	10	13
<b>DIN 508-10-M8-10</b>	10	M8	15 -0.5	12	6 -0.5	10	13
<b>DIN 508-12-M8-8</b>	12	M8	18 -0.5	14	7 -0.5	12	22
<b>DIN 508-12-M8-10</b>	12	M8	18 -0.5	14	7 -0.5	12	23
<b>DIN 508-12-M10-8</b>	12	M10	18 -0.5	14	7 -0.5	12	20
<b>DIN 508-12-M10-10</b>	12	M10	18 -0.5	14	7 -0.5	12	21
<b>DIN 508-14-M10-8</b>	14	M10	22 -0.5	16	8 -0.5	14	38
<b>DIN 508-14-M10-10</b>	14	M10	22 -0.5	16	8 -0.5	14	38
<b>DIN 508-14-M12-8</b>	14	M12	22 -0.5	16	8 -0.5	14	34
<b>DIN 508-14-M12-10</b>	14	M12	22 -0.5	16	8 -0.5	14	35
<b>DIN 508-16-M10-8</b>	16	M10	25 -0.5	18	9 -0.5	16	59
<b>DIN 508-16-M10-10</b>	16	M10	25 -0.5	18	9 -0.5	16	59

<b>DIN 508-16-M12-8</b>	16	M12	25 -0.5	18	9 -0.5	16	55
<b>DIN 508-16-M12-10</b>	16	M12	25 -0.5	18	9 -0.5	16	54
<b>DIN 508-16-M14-8</b>	16	M14	25 -0.5	18	9 -0.5	16	51
<b>DIN 508-16-M14-10</b>	16	M14	25 -0.5	18	9 -0.5	16	51
<b>DIN 508-18-M12-8</b>	18	M12	28 -0.5	20	10 -0.5	18	85
<b>DIN 508-18-M12-10</b>	18	M12	28 -0.5	20	10 -0.5	18	85
<b>DIN 508-18-M14-8</b>	18	M14	28 -0.5	20	10 -0.5	18	74
<b>DIN 508-18-M14-10</b>	18	M14	28 -0.5	20	10 -0.5	18	74
<b>DIN 508-18-M16-8</b>	20	M16	28 -0.5	20	10 -0.5	18	62
<b>DIN 508-18-M16-10</b>	20	M16	28 -0.5	20	10 -0.5	18	62
<b>DIN 508-20-M12-8</b>	20	M12	32 -0.5	24	12 -0.5	20	131
<b>DIN 508-20-M12-10</b>	20	M12	32 -0.5	24	12 -0.5	20	131
<b>DIN 508-20-M16-8</b>	20	M16	32 -0.5	24	12 -0.5	20	116
<b>DIN 508-20-M16-10</b>	20	M16	32 -0.5	24	12 -0.5	20	116
<b>DIN 508-20-M18-8</b>	20	M18	32 -0.5	24	12 -0.5	20	110
<b>DIN 508-20-M18-10</b>	20	M18	32 -0.5	24	12 -0.5	20	110
<b>DIN 508-22-M16-8</b>	22	M16	35 -0.5	28	14 -0.5	22	160
<b>DIN 508-22-M16-10</b>	22	M16	35 -0.5	28	14 -0.5	22	160
<b>DIN 508-22-M20-8</b>	22	M20	35 -0.5	28	14 -0.5	22	149
<b>DIN 508-22-M20-10</b>	22	M20	35 -0.5	28	14 -0.5	22	149
<b>DIN 508-24-M20-8</b>	24	M20	40 -0.5	32	16 -0.5	24	237
<b>DIN 508-24-M20-10</b>	24	M20	40 -0.5	32	16 -0.5	24	237
<b>DIN 508-24-M22-8</b>	24	M22	40 -0.5	32	16 -0.5	24	228

<b>DIN 508-24-M22-10</b>	24	M22	40 -0.5	32	16 -0.5	24	228
<b>DIN 508-28-M20-8</b>	28	M20	44 -1	36	18 -1	28	347
<b>DIN 508-28-M20-10</b>	28	M20	44 -1	36	18 -1	28	347
<b>DIN 508-28-M24-8</b>	28	M24	44 -1	36	18 -1	28	314
<b>DIN 508-28-M24-10</b>	28	M24	44 -1	36	18 -1	28	314
<b>DIN 508-36-M30-8</b>	36*	M30	54 -1	44	22 -1	36	586
<b>DIN 508-36-M30-10</b>	36	M30	54 -1	44	22 -1	36	585
<b>DIN 508-42-M36-10</b>	42	M36	65 -1	52	26 -1	42	960

