

CN 614.4-NI

POSICIONADOR


Tipo de pressão / com parafuso


Habitação

Aço inoxidável AISI 305

Parafuso

Aço inoxidável AISI 303 NI

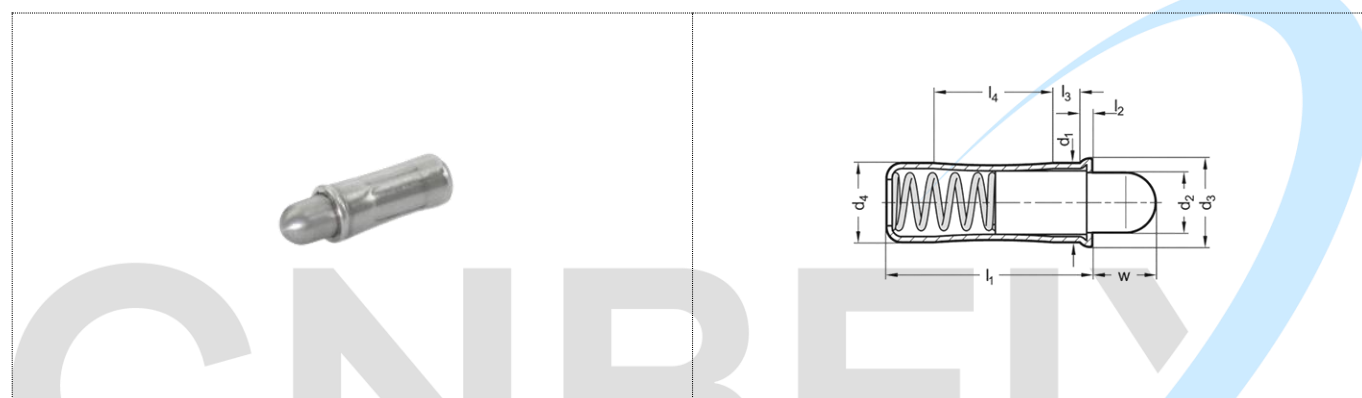

| Descrição | $d_1 + 0.1$ | d_2 | d_3 | $d_4 \pm 0.05$ | l_1 | $l_2 \approx$ | $l_3 \approx$ | $l_4 \approx$ | w | Carga de mola em N \approx inicial | Carga de mola em N \approx final |  |
|----------------|-------------|-------|-------|----------------|-------|---------------|---------------|---------------|-----|--------------------------------------|------------------------------------|---|
| CN 614.4-04-NI | 4 | 2.8 | 4.6 | 4 | 10.7 | 0.9 | 1.8 | 5.6 | 2.7 | 3 | 8.2 | 1 |
| CN 614.4-05-NI | 5 | 3.8 | 5.6 | 5 | 12 | 0.9 | 2.1 | 6 | 4 | 3.3 | 9 | 2 |
| CN 614.4-06-NI | 6 | 4.8 | 6.5 | 6 | 15 | 1 | 2.3 | 8.2 | 5.5 | 6.1 | 12 | 2 |
| CN 614.4-08-NI | 8 | 6.2 | 8.5 | 7 | 18 | 1.1 | 2.9 | 9.5 | 6.5 | 10.7 | 17 | 4 |
| CN 614.4-10-NI | 10 | 8 | 11 | 9 | 26 | 1.5 | 3.5 | 15 | 8 | 16.2 | 29 | 9 |